REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-010240	07-07-14	DM	DM
	A1	REVISED PER ECR-20-003720	10MAR2020	AP	IG

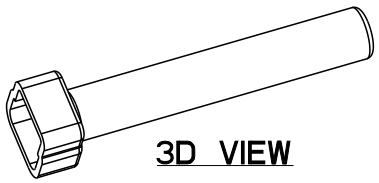

3D VIEW

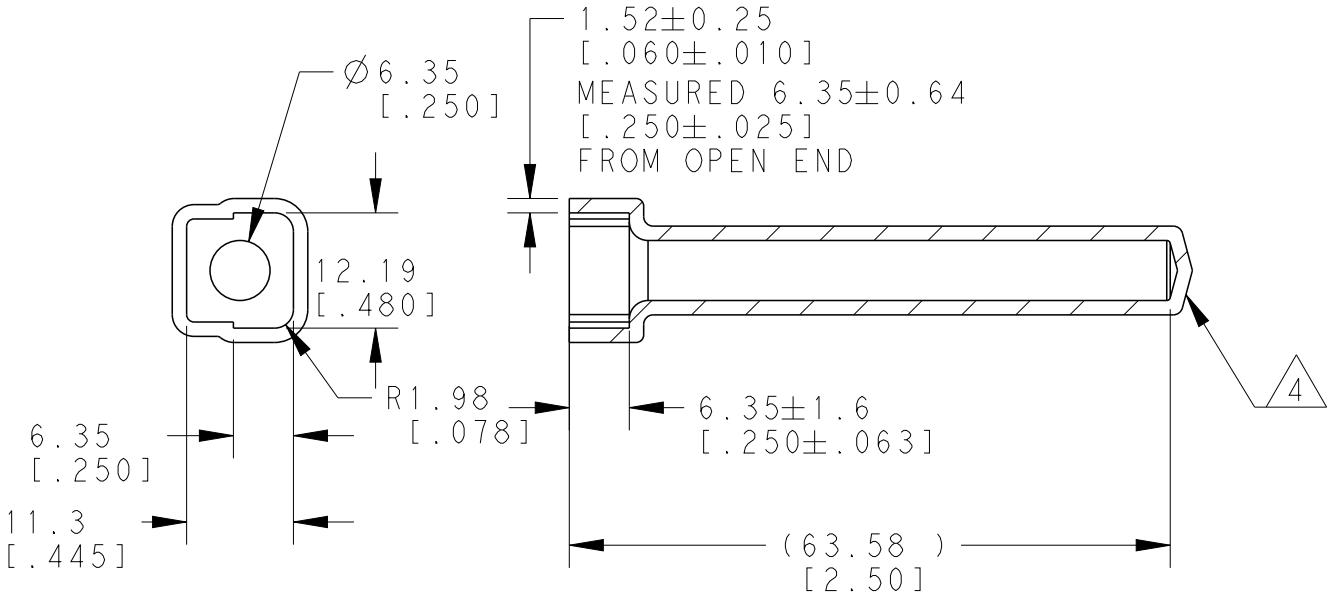

5. SMALL NON-FILLS ARE ACCEPTABLE INSIDE OF PART, INCLUDING SUPPLIER MARKING.
4. SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND. WALL THICKNESS ON THIS END MAY VARY.
3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.
2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +100°F]
1. THIS PART IS USED ON DTM06-2S PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

TE INTERNAL PN	DEUTSCH PN
DTM2S-BT-BK	DTM2S-BT-BK

THIS DRAWING IS UNPUBLISHED. © COPYRIGHT 2019 BY TE CONNECTIVITY ALL RIGHTS RESERVED. RELEASED FOR PUBLICATION 2019

DIMENSIONS: MM [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±0.63[.025]
3 PLC ±
4 PLC ±
ANGLES ±5°

DWN D. MEYER 07JUL2014
CHK B. MILLIGAN 07JUL2014
APVD D. MEYER 07JUL2014

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT 4.00 g

MATERIAL PVC
FINISH BLACK

TE Connectivity

NAME BOOT, PLUG, 2PIN DTM SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	4AFU8	C-DTM2S-BT-BK	-

CUSTOMER DRAWING

SCALE 5:4 SHEET 1 OF 1 REV A1

1469-35 (3/13)