


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO-14-011385	24JUL2014	DM	DM
	A2	REVISED PER PCN E-18-006791	03MAY2018	SM	DM

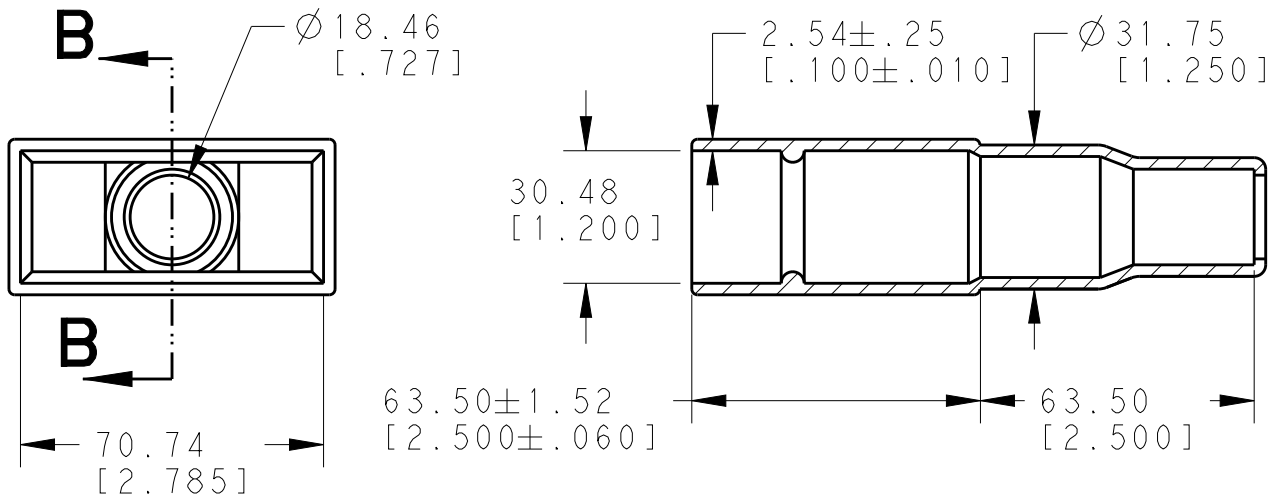

SECTION B-B

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.


2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON
 DRC12-40PX(E)-XXXX RECEPTACLE
 DRC14-40PX(E)-XXXX RECEPTACLE
 DRC16-40SX(E)-XXXX PLUG
 WHERE X=A,B,C,D KEYS AND XXXX=MODIFICATION

TE INTERNAL PN	DEUTSCH PN
DRC40-BT-GRAY	DRC40-BT-GRAY

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2014

ALL RIGHTS RESERVED. BY TE CONNECTIVITY © COPYRIGHT 2014

DIMENSIONS: MM [INCH]	DWN D. MEYER	01 JUL 2014	MATERIAL	PVC	FINISH	GRAY
	CHK D. HASIBUAN	01 JUL 2014	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. MEYER	01 JUL 2014				
0 PLC ±	PRODUCT SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ±	APPLICATION SPEC	-	A4	4AFU8	©-DRC40-BT-GRAY	
2 PLC ±	WEIGHT	52.00 G	CUSTOMER DRAWING			
3 PLC ±			SCALE	NONE	SHEET	1 OF 1
4 PLC ±					REV	A2
ANGLES ±5°						